

PROJECT INFORMATION	Job Name/Location: _____
	Engineer: _____ Date Submitted: _____
	Contractor: _____ Submitted By: _____
	Manufacturer's Rep.: _____ Approved By: _____

TECHNICAL DATA	Material:	PP-RCT (beta crystalline random copolymer polypropylene)	
	Standard Grade Hydrostatic Ratings for SDR 7.3 (50 year):	150 psi @ 180°F 224 psi @ 140°F 423 psi @ 68°F	
	Linear Expansion Rate:	0.23 in/10°F/100 ft	

PRODUCT INFORMATION AND APPLICATION USE

Niron AllPro is a preinsulated pipe that is manufactured with Niron Clima PP-RCT pipe as the carrier pipe and is housed within an IPS Sch. 40 jacket pipe that is extruded with a 30 year U.V. resistant white PP-RCT external layer. The pipe is superinsulated with highly efficient closed cell polyurethane foam (PUF) insulation which exceeds the required thickness for the ASHRAE 90.1 Energy Code in all sizes. The Niron Clima carrier pipe is extruded with a PP-RCT middle layer that features our "Powercore" fiberglass technology. The Powercore layer stiffens the pipe for improved above ground support while significantly restricting expansion and contraction during temperature swings. The inner layer of the carrier pipe is "Beta Nucleated" PP-RCT engineered plastic offering superior performance and extremely long life. This product is offered with a 30 year product warranty for the entire system. The carrier pipe ends are extended beyond the jacket pipe ends to allow joining by the AllPro EF electrofusion or AllPro BF butt fusion welding methods.





	DESCRIPTION	PART NUMBER	I.D.	JACKET	WEIGHT
<input type="checkbox"/>	1" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP32373	0.91	3.50	1.38
<input type="checkbox"/>	1" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP32373S40	0.91	3.50	1.38
<input type="checkbox"/>	1 ¼" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP40373	1.14	3.50	1.51
<input type="checkbox"/>	1 ¼" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP40373S40	1.14	3.50	1.51
<input type="checkbox"/>	1 ½" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP50473	1.43	4.50	2.26
<input type="checkbox"/>	1 ½" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP50473S40	1.43	4.50	2.26
<input type="checkbox"/>	2" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP63473	1.80	4.50	2.55
<input type="checkbox"/>	2" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP63473S40	1.80	4.50	2.55
<input type="checkbox"/>	2 ½" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP75673	2.14	6.625	4.45
<input type="checkbox"/>	2 ½" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP75673S40	2.14	6.625	4.45
<input type="checkbox"/>	3" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP90673	2.57	6.625	4.91
<input type="checkbox"/>	3" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP90673S40	2.57	6.625	4.91

continued on pg 2

LISTINGS	APPLICABLE CODES	APPLICABLE STANDARDS	CONTACT INFO
uNSF-14; ICC-ES; IAPMO	ICC; IPC; IMC; UPC; UMC; NSPC; NPC of Canada; NBC of Canada; ASHRAE 90.1; IECC Energy Code	ANSI/NSF 14; ASTM F2389; CSA B137.11	Nupi Americas, Inc. 314 Commerce Parkway Early Branch, SC 29916 phone: +1 803 398 3579 fax: +1 803 398 3639 info@nupiamericas.com

	DESCRIPTION	PART NUMBER	I.D.	JACKET	WEIGHT
<input type="checkbox"/>	3 1/2" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP110873	3.15	8.625	7.61
<input type="checkbox"/>	3 1/2" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP110873S40	3.15	8.625	7.61
<input type="checkbox"/>	4" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP125873	3.57	8.625	8.30
<input type="checkbox"/>	4" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP125873S40	3.57	8.625	8.30
<input type="checkbox"/>	6" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP1601073	4.57	10.75	12.73
<input type="checkbox"/>	6" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP1601073S40	4.57	10.75	12.73
<input type="checkbox"/>	8" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP2001273	5.72	12.75	18.97
<input type="checkbox"/>	8" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP2001273S40	5.72	12.75	18.97
<input type="checkbox"/>	10" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP2501473	7.15	14.00	25.58
<input type="checkbox"/>	10" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	27TNIRCLAP2501473S40	7.15	14.00	25.58
<input type="checkbox"/>	12" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 20' Length	27TNIRCLAP3151673	9.00	16.00	37.14
<input type="checkbox"/>	12" Niron Clima AllPro PP-RCT Pipe, SDR 7.3, 40' Length	"27TNIRCLAP3151673S40	9.00	16.00	37.14

Minimum Insulation Thickness per ASHRAE Standard 90.1

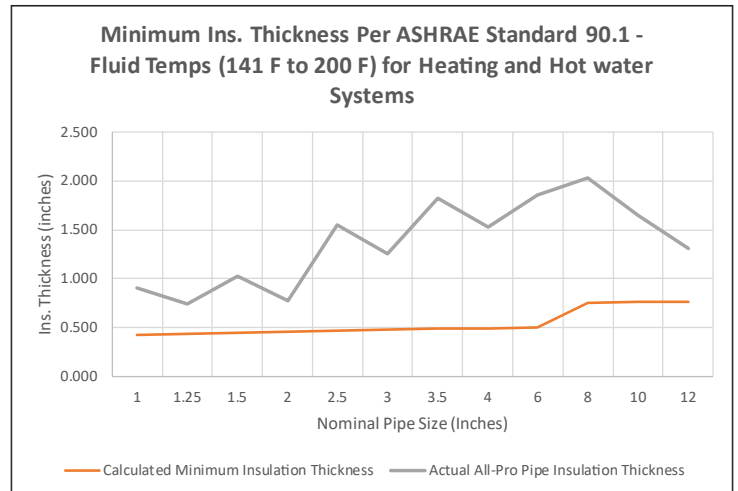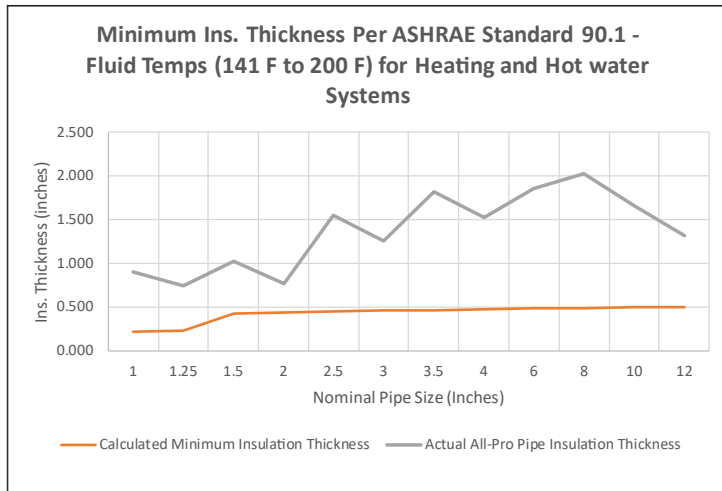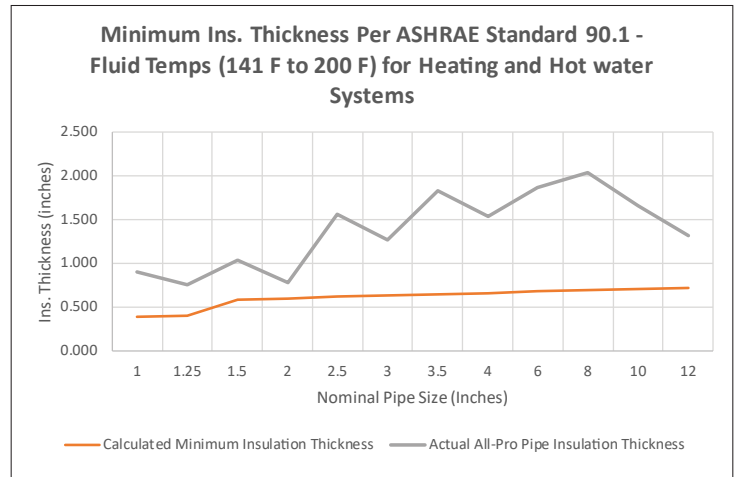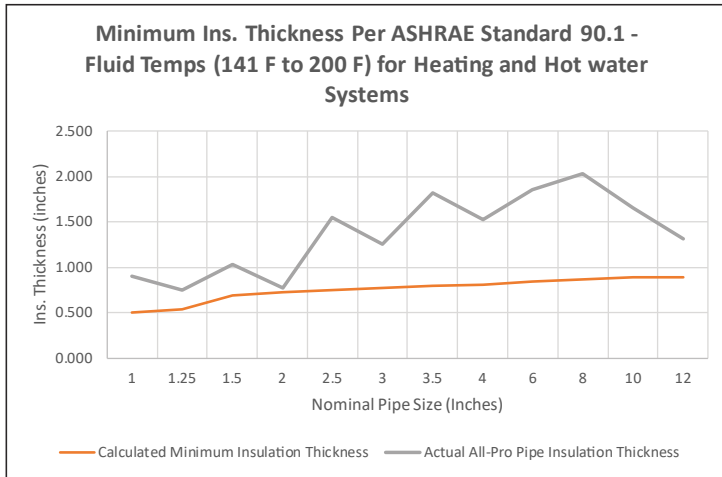

R VALUES FOR ALL-PRO PIPING SDR 7.3 COMPARED TO ENERGY CODE

				R	R	R	R	R
Size Inner Pipe	Size Inner Pipe	Size Outer Jacket	Insulation Thickness PUF	R Value Niron Clima AllPro SDR 7.3 Preinsulated Pipe	Estimated R Value per ASHRAE 90.1 for Less Than 40°F	Estimated R Value per ASHRAE 90.1 40°F to 60°F	Estimated R Value per ASHRAE 90.1 105°F to 140°F	Estimated R Value per ASHRAE 90.1 141°F to 200°F
in	mm	in	in					
1	32	3.5	0.90	10.0	5.9	2.4	5.5	8.8
1¼	40	4.5	1.25	14.1	5.6	2.3	5.2	8.3
1½	50	4.5	1.03	10.6	5.4	5.2	8.3	11.5
2	63	4.5	0.77	7.3	5.1	4.9	7.8	10.9
2	63	5.563	1.28	13.2	5.1	4.9	7.8	10.9
2½	75	6.625	1.58	16.3	5.0	4.8	7.5	10.3
3	90	6.625	1.26	12.1	4.8	4.6	7.2	9.9
3½	110	8.625	1.83	18.0	4.7	4.5	7.0	9.6
4	125	8.625	1.53	14.4	4.6	4.4	6.8	9.3
6	160	10.75	1.86	17.4	6.9	4.2	6.4	8.7
8	200	12.75	2.03	18.7	6.7	4.1	6.2	8.3
10	250	14	1.65	14.8	6.5	4.0	6.0	8.0
12	315	16	1.31	11.8	6.4	4.0	5.9	7.9